



ARV-VC212

Arvia Video Conferencing PTZ Camera



Key Features

- ▶ 12x optical zoom
- ▶ Sleek and intelligent design
- ▶ 1080P full HD PTZ camera
- ▶ Plug & Play USB Connectivity
- ▶ Crystal clear HD1080P image quality
- ▶ Accurate, smooth and silent PTZ Movement
- ▶ Preset: 9 via IR remote setting (256 via RS232)
- ▶ Superior quality with Full Glass Lens Material
- ▶ 60.9 °wide field of view with no video distortion
- ▶ 1/2.8 inch high quality, 3.1MEGA PIXEL CMOS sensor
- ▶ Support ceiling mount, wall mount and tripod mount (Reverse mountable)
- ▶ 2D and 3D NR for best video quality in different lighting conditions
- ▶ Support Visca, Pelco-P, and Pelco-D protocol, RS232/RS485 Camera Control
- ▶ Compatible with most leading video conferencing software and platform



big wide-angle video conferencing camera



USB2.0
video output



HD 1080P
12X optical zoom



PTZ rotation
355° rotation



Lens flip
Support lifting



Crystal clear images high quality

3.10 Megapixels


1/2.8" Progressive CMOS

12x Optical Zoom

1920* 1080 Resolution




Main details of 1080P HD video conference camera

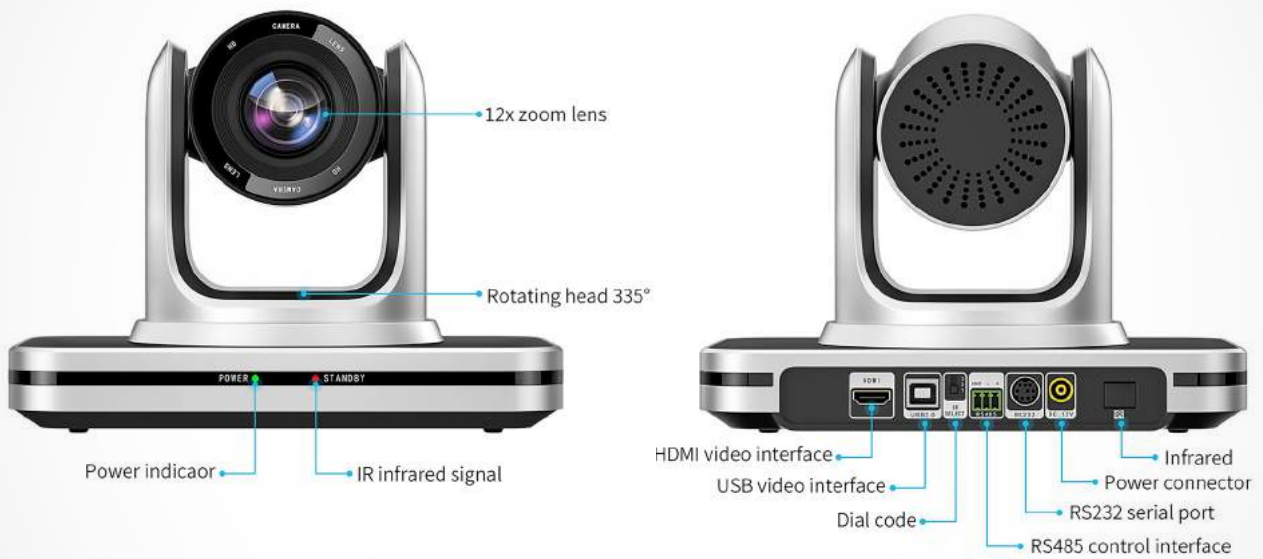


Compatible with Win7/8/10, XP,
Mac OS x10.7 or above and android etc




Multiple modes of control

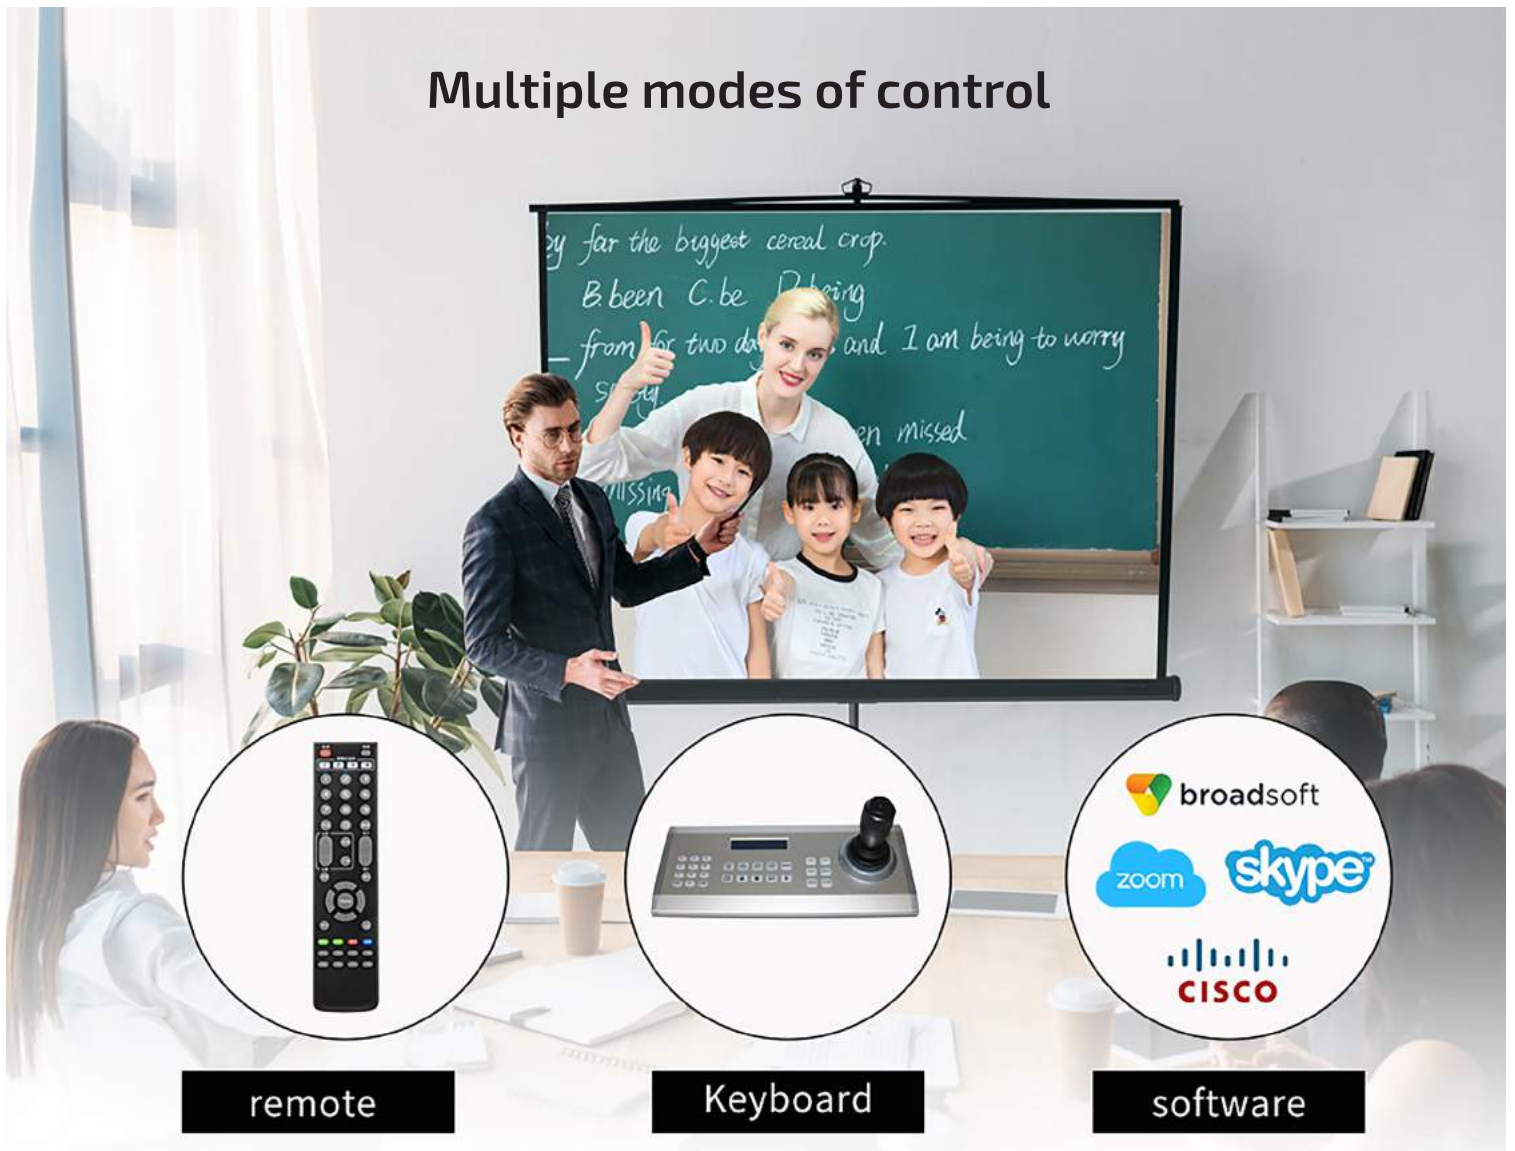

Application scenario

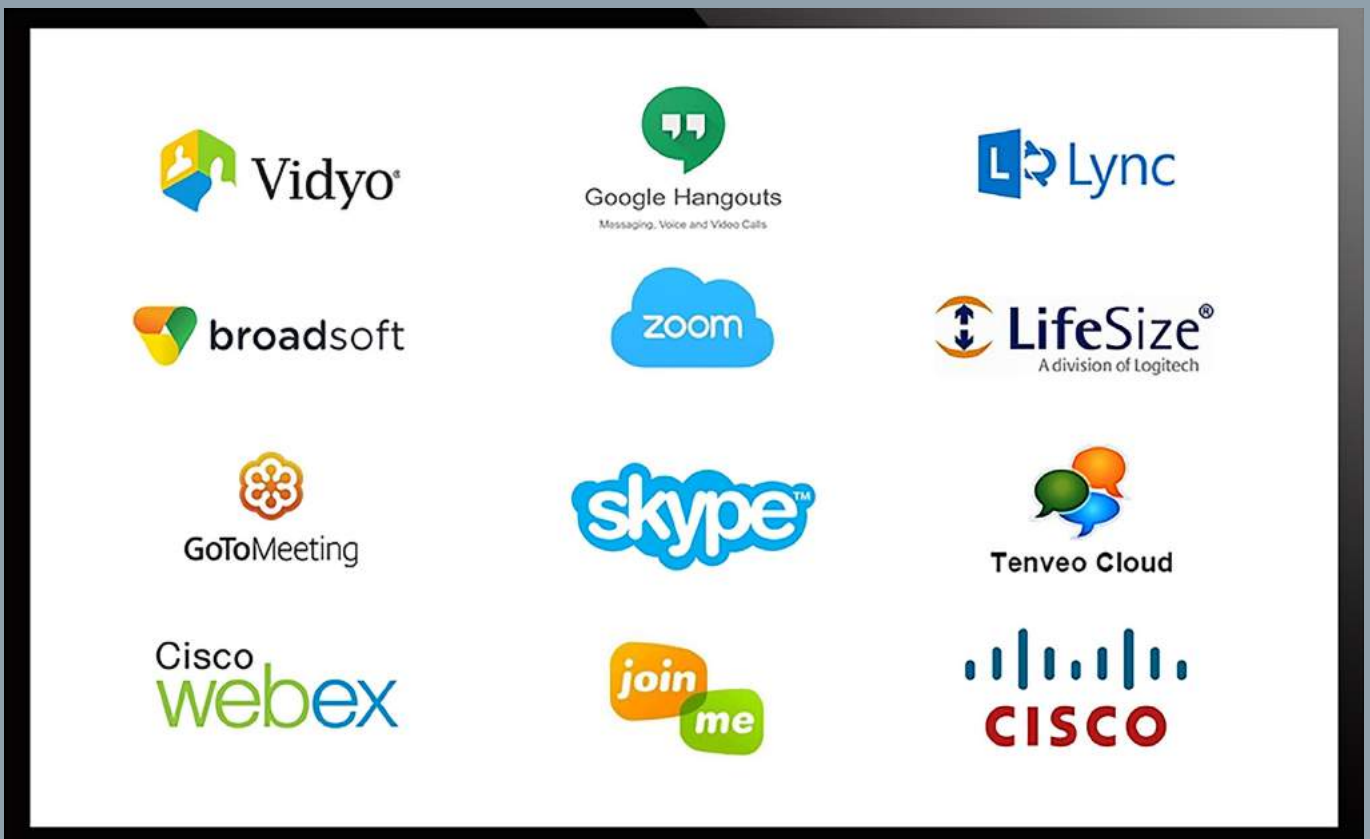

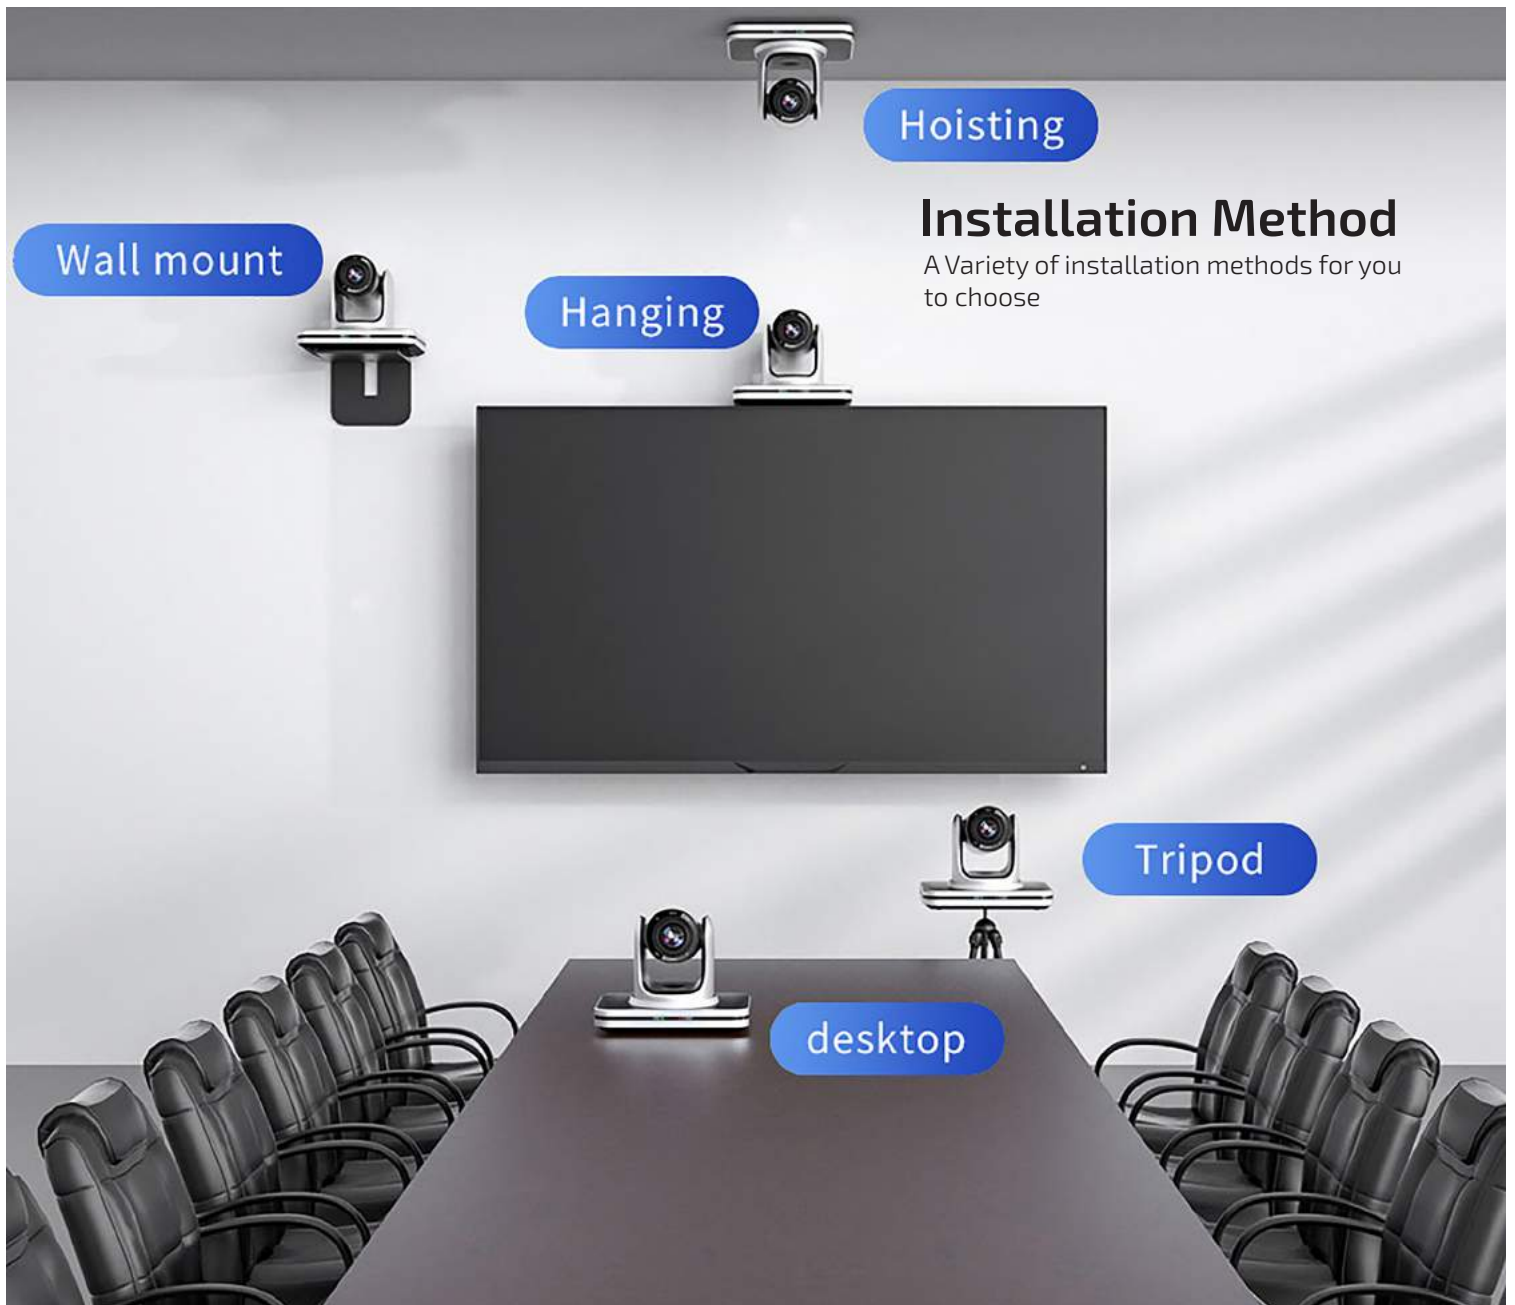

Hoisting

Installation Method

A Variety of installation methods for you to choose

Wall mount

Hanging

Tripod

desktop

Application scenario



Video Conferencing



Collaboration



Education



Tele-medicine



Government Projects



Lecture Capture

Technical parameter

Image Sensor	1/2.8 inch CMOS
Effective Pixels	3.50 Megapixels(16:9)
Resolution	U2:MJPEG/H.264:320*240,640*480,720*576,1280*720,1920 *1080
HD	YUY2:320*240,640*360,640*480,1024*576
Signal	PAL/NTSC
Lens	12X optical zoom, F=3.9mm(W)~46.8 mm((T)
Horizontal ViewAngle	72.5°(W)~7.4°(T)
Focus System	Auto/Manual
Minimum Illumination	0.5Lux
Shutter speed	1/30~1/10,000s
Gain	Auto/Manual
White Balance	Auto/Indoor/Outdoor/Manual
Image Effect	color/black and white/image flip
S/N Ratio	≥50db
Pan	355°(max.speed:80°/s)
Tilt	-30°to +90°(max.speed:60°/s)
Video Output HD	USB2.0, HDMI
Protocol	SONY VISCA、PELCO P/D
Control Mode	RS-232, RS-485
Power	12V DC(10.8~13.0V DC)
Camera Size	(L)220×(W)150×(H)166mm
Package Size	(L)300×(W)240×(H)250mm
Net weight	1390g
Gross weight	2790g
Accessories	DC 12V power adapter, IR Remote, Operation manual, USB cable, HDMI cable Ceiling bracket

Packaging

Selling Units:	Single item
Single package size:	30X24X25 cm
Single gross weight:	2.790 kg
Package Type:	Power adapter, IR Remote, Operation manual, USB cable,Ceiling bracket



Israk Solutions Sdn. Bhd (1289622-T)

No. 20, Jalan BP 6/13, Bandar Bukit Puchong, 47120, Puchong, Selangor



<http://www.israk.my>



info@israk.my



03-8966 2405